

SOCKET & PLUG 07

63A/125A

FLAMEPROOF
ZONE 1,2,21,22




SPECIFICATION

TYPE	Socket (RE)
HAZARDOUS AREA ZONE	Zone 1 - Zone 2 (Gas) Zone 21 - Zone 22 (Dust)
MARKING	Ex II 2 G D Ex db IIC T6 Gb Ex tb IIIC T85°C Db
STANDARDS	EN60079-0 EN60079-1 EN60079-31
EU-TYPE EXAMINATION CERTIFICATE NO.	IMQ 22 ATEX 049X
INGRESS PROTECTION	IP66 (With Protective Cover or Plug)
ENCLOSURE MATERIAL	Aluminium Alloy
ENCLOSURE FINISH	RAL7032 (Other colors are available on request)
AMBIENT TEMPERATURE	-30°C to +55°C
FREQUENCY	50/60 Hz
SWITCH	Internal Interlock Switch Internal Circuit Breaker with external control handle
EARTHING	M5 External / M8 Internal Earth Screw
LID FIXING	Threaded Type
ENTRIES	Up to M40/M50
ORDERING DETAILS	Three-layer painting system for use in corrosive environment

SPECIFICATION

TYPE	Plug (PL)
HAZARDOUS AREA ZONE	Zone 1 - Zone 2 (Gas) Zone 21 - Zone 22 (Dust)
MARKING	Ex II 2 G D Ex db IIC T6 Gb Ex tb IIIC T85°C Db
STANDARDS	EN60079-0 EN60079-1 EN60079-31
EU-TYPE EXAMINATION CERTIFICATE NO.	IMQ 22 ATEX 049X
INGRESS PROTECTION	IP66 (With Socket)
ENCLOSURE MATERIAL	Aluminium Alloy
ENCLOSURE FINISH	RAL7032 (Other colors are available on request)
AMBIENT TEMPERATURE	-30°C to +55°C
FREQUENCY	50/60 Hz
ORDERING DETAILS	Three-layer painting system for use in corrosive environment

BODY SIZE	SWITCHING CAPACITY	POLARITY	RATED VOLTAGE(V)	ORDERING CODE		WIRE SIZE (MAX)	ENTRY (PLUG)
				SOCKET	PLUG		
125	63A	2P+E	240/230	RET 63	PLT 125	50mm	M40
		3P+E	690/525/440/415	REQ 63	PLQ 125		
		3P+N+E	690/525/440/415	REP 63	PLP 125		
125	125A	2P+E	240/230	RET 125	PLT 125	50mm	M40
		3P+E	690/525/440/415	REQ 125	PLQ 125		
		3P+N+E	690/525/440/415	REP 125	PLP 125		

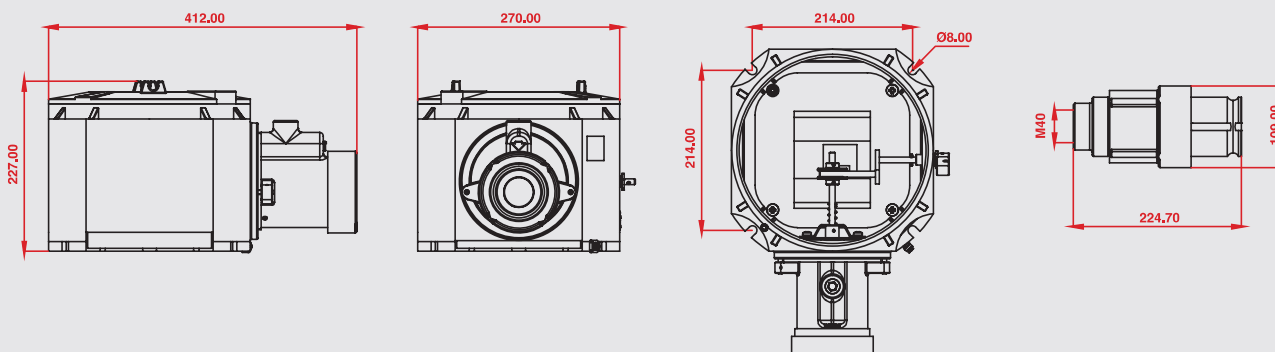

SEMC
www.shomal.com